

BTX6125 MS

Outdoor Scoreboard Dedicated to multisport:

Basketball - Handball - Volley ball - Tennis - Padel - Kayak polo - Floorball - Korfbal - Netball



General features

- High luminosity SMD LED technology.
- Luminosity adjustment from the main keyboard. The adjustment can be performed at any time during a game.
- Wired or wireless (868 MHz) communication.
- Integrated horn - 100dB at 1 metre.
- Tropicalised electronics.

Certifications and standard conformity


- RED (radio): EN 301 489-3, EN 300 220-2.
- Electromagnetic compatibility (CEM): EN 55024, EN 55032.
- Low voltage: EN 60950.

Note: The whole BTX6000 range has been designed to be operated continuously outdoor and in aggressive environment such as swimming pools and the ice rink. The materials used are powder coated aluminium for the casing and PPMA thermoplastic front crystal or Polycarbonate crystal. The electronic components are tropicalized which means that they are coated with a moisture proof rosin.

BTX6125 MS

Display

BTX6125 HK		Number of Digits	Height of Digits	LED Colour	
A	• Game clock or Time of Day clock.....	4	25 cm	Red	
B	• Teams fouls.....	1 per team	20 cm	Red	
C		3 per team	25 cm	Red	
D	• Period number.....	1	20 cm	Red	
E	• Time-out indicator.....	3 dots per team	Ø36 mm	Red	
F	• End of period indicator.....	1 dot	Ø66 mm	Red	
G	• Stopwatch exclusions (with player number) or display results of previous sets.....	2 x 3 per team	15 cm	Red	
H	• Players' numbers.....	2 x 2 per team	15 cm	Red	

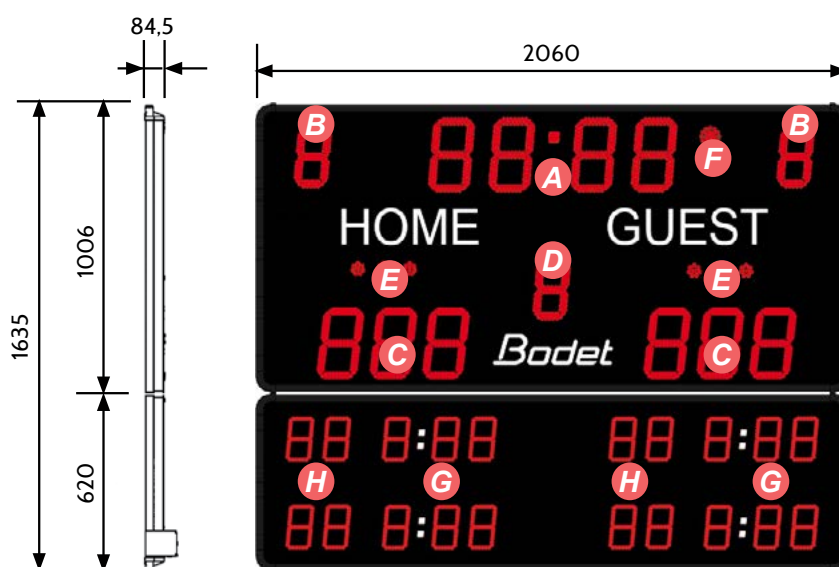

Dimensions in mm

Technical features

Dimensions L x H x D (mm)	Weight	Construction	Protection Index	Optimal viewing distance	Viewing angle
2060 x 1635 x 84.5	40 kg	Aluminium casing with protective glass cover	IP54 IK07	60 m at 120 m	160°
Power supply		Power consumption	Electrical protection	Operating temperature range	
100-240VAC		280W	16 A Circuit breaker	-20° to 50°C	

References

- 915 792..... BTX6125 MS (keyboard not included).
- 916 003..... Scorepad keyboard.
- 915 179..... Additional Horn.